Ytelseserklæring

Sonablock Treullplate 1,0 • 1,5 (25 mm)

I overensstemmelse med forordning (EU) nr. 305/2011

Nummer: SB 1.1

1.	Entydig identifikasjonskode for produkttypen	Sonablock Treullplate 1,0 (25 mm) 1,5 (25 mm)	
2.	Tilsiktet bruk	Termisk og akustisk isolasjon i bygninger – membrankomponent for nedhengte himlinger til innvendig bruk i bygninger.	
3.	Produsent	Stiga RM, seven A Loka road, Smardes parish, Tukums municipality, Latvija, LV-3129	
4.	System for vurdering og verifikasjon av ytelsenes konstans	System 1 og 3 i henhold til EU-forordning 305/2011.	
5.	Harmonisert standard	EN 13168:2012+A1:2015	
6.	Teknisk kontrollorgan	NB 1325 NB 1688 NB 2040	
7.	Deklarert ytelse		
	Vesentlige egenskaper	Verdi	Harmoniseret standard teknisk spesifikasjon
	Reaksjon på brann	B-s1,d0	4.2.8
	Varmeledningsevne Sonablock fibre 1.0 Sonablock fibre 1.5	 0,067 W/mK 0,070 W/mK	4.2.1
	Varmebestandighet Sonablock fibre 1.0 Sonablock fibre 1.5	 0,35 W/mK 0,30 W/mK	4.2.1
	Lengde, bredde, tykkelse	L4-W2-T2	4.2.2-4.2.3
	Vinkelretthet	S1	4.3.3
	Bøyefasthet	BS1300 ≥ 1300 kPA	4.3.7
	Trykkfasthet	CS(10)300	4.3.4
	Lydabsorpsjon Sonablock fibre 1.0 Sonablock fibre 1.5	 Aw 0,60 Aw 0,65	4.3.11

Merk: Ytelse knyttet til andre egenskaper oppført i den harmoniserte standarden EN 13168, men som ikke er relevante for tiltenkt bruk av vårt produkt: NPD (ingen ytelse fastsatt).

Ytelsen til produktene identifisert ovenfor er i samsvar med de deklarerte ytelsene. Denne ytelseserklæringen er utstedt i samsvar med forordning (EU) nr. 305/2011, under produsentens eneansvar som identifisert ovenfor.

Underskrevet for og på vegne av produsenten av:

Se engelsk versjon, neste side

Navn og stilling

Sted og utstedelsesdato

Underskrift

BMC
www.bmc-norge.no
Kilengaten 1, Inng. A, 3. etasje
3117 Tønsberg
T: 33 30 03 90
bmc@bmc-norge.no

Sonablock by Stiga RM

LOOKS GOOD.
SOUNDS BETTER.

DECLARATION OF PERFORMANCE
SB 1.1

1. **Unique identification code of the product type:**
   - Sonablock Fiber 1.0 (25mm)
   - Sonablock Fiber 1.5 (25mm)
2. **Intendent uses:**
   - Thermal and acoustic insulation in buildings- Suspended ceilings membrane component for use internally in buildings.
3. **Manufacturer:**
   - Stiga RM, seven A Loka road, Smardes parish, Tukums municipality, Latvija, LV-3129
4. **Systems of assessment and verification of cosstancy of performance (AVCP):**
   - Systems 1 and 3 according to EU Regulation 305/2011
5. **Harmonised standart:**
   - EN 13168:2012+A1:2015
6. **Notify Body:**
   - NB 1325
   - NB 1688
   - NB 2040
7. **Declared performance:**

ESSENTINTIAL CHARACTERISTICS		PERFORMANCE	HARMONINIZED TECHNICAL SPECIFICATION
Reaction to fire		B-s1,d0	4.2.8
Thermal conductivity	Sonablock fibre 1.0	0.067 W/mK	4.2.1
	Sonablock fibre 1.5	0.070 W/mK	
Thermal resistance	Sonablock fibre 1.0	0.35 m2 K/W	4.2.1
	Sonablock fibre 1.5	0.30 m2 K/W	
Lenght, width, thickness		L4-W2-T2	4.2.2-4.2.3
Squareness		S1	4.3.3
Bending strenght		BS1300 ≥1300 kPA	4.3.7
Compresive strenght		CS(10)300	4.3.4
Sound absorbtion	Sonablock fibre 1.0	Aw -0.60	4.3.11
	Sonablock fibre 1.5	Aw -0.65	

Note. Pereformance related to other characteristics listed in teh harmonized standarts EN 13168, but not relevant to the intended use of our product: **NPD**

The performance of the products identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No. 305/2011, under the sole responsibility of the manufacturer identified above

Stiga RM WWCB factory manager- Sandis Fogelmanis
Tukums, 13.03.2026

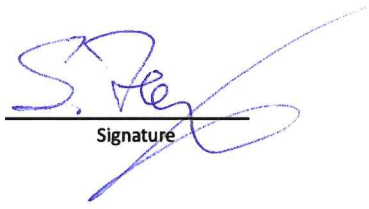

Signature

Stiga RM Distribution
www.stigarm.lv

Loka Road Seven A, Smārde Parish, Tukums Municipality,
Latvija LV-3129
sonablock@stigarm.lv +371 26660048